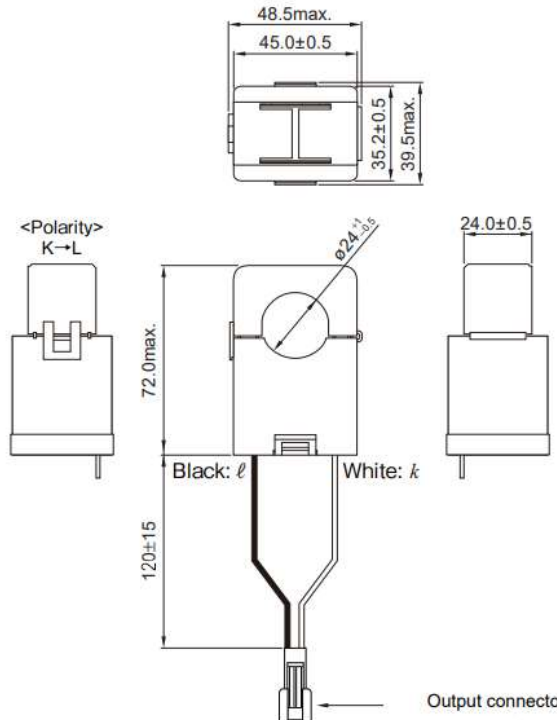
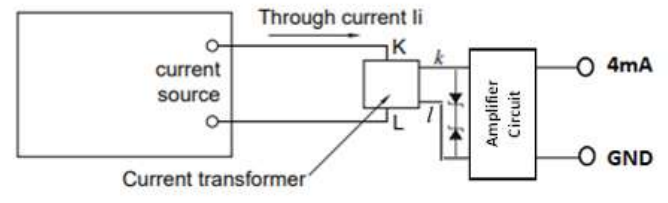


DATASHEET

Product information ICUR273010-CLAMP-300A

Name	ICUR273010-CLAMP-300A
	
	Current clamp 300V~ 300A~, with integrated amplifier 22.6 mV/A, equipped with a built-in open-circuit protective device, 24V IEPE compatible.
Product description	
Type	ICUR273010-CLAMP-300A
Description	Clamp-on current sensor 300V~ 300A~, with integrated amplifier 22.6 mV/A, for easy installation on existing power equipment, equipped with a built-in open-circuit protective device, compatible with RoHS directive, 24V IEPE compatible.
Note	The application of these products in environments with dust, water, fog, direct sunlight... should always be checked before use.
Product specifications	
Operating temperature	-20° to 60°C
Storage temperature	-30° to 60°C
Applied current	AC 0.1 to 300 Arms (50/60Hz)
Maximum allowed current	AC 400 Arms continuous
Internal clamp section diameter	24 mm
Integrated amplifier	22.6 mV/A
Open-circuit protection	7.5V clamp element
Allowable open/closing clamp	About 100 times
Withstanding voltage	AC2200V, 1 min. (Between outer case and output)
Insulation resistance	100MΩ Over (DC500V)
Flame retardant grade	UL 94 V-0
Output connector	Molex Ditto
Output lead wire length	120 mm
Weight	221 g

DATASHEET

Picture & Drawing	
<p>Dimensions</p>	 <p>Dimensions in mm</p>
<p>Electric Circuit</p>	 <p>24V IEPE compatible</p>