


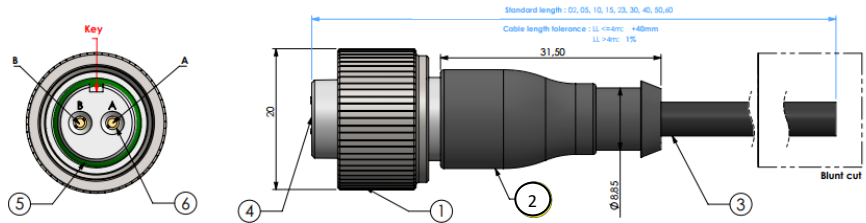
## DATASHEET

### Product information CONN261015-MIL2P-15MTR

<b>Name</b>	CONN261015-MIL2P-15MTR
	
	2 Pin MIL connector with 15 meters cable, shielded, PU, IP67, 90°C max., with blunt cut end.
<b>Product description</b>	
Type	CONN261015-MIL2P-15MTR
Description	2 Pin MIL connector with 15 meters cable, shielded, PU, IP67, 90°C max., with blunt cut end. Country of origin: EU HS: 90319000 - ECCN: No
Note	Shielding is not connected to the nut. Standard available cable lengths (m): 02, 05, 10, 15, 23, 30, 40, 50, 60 m.
<b>Product specifications</b>	
Material	PU cable, black, twisted pair, shielded
Cable length	15 meters, blunt cut end
Outer diameter	Ø4.8mm ±0.2mm
Inner strands	2 x 0.5mm <sup>2</sup>
Color code	A: White (-) B: Red (+) Shielding: bare conductor
Rated voltage cable	160V AC
IP rating cable assembly	IP 67
Temperature range cable assembly	-30° to +90°C
Current rating	4A at 40°C
Mating cycles nut	>500
Recommended torque nut	0.6Nm
Connector material	Stainless steel AISI 316L, over molded cable TPU, UL94, black
Signal contacts	CuZn-Gold 1.27um, MIL approved contact

## DATASHEET

### Drawing & Picture



1	Nut	Stainless steel Aisi 316L
2	Over mold cable	IPU, UL94, black
3	Cable	PU black, twisted pair
4	Contact carrier 2 pin	PolyAmide 6.6 30% Glass filled
5	O-ring	FPM
6	Signal contact	CuZn-Gold, Mill approved contact

